


# HDW-750P / 730S

## User Guide

V1.4

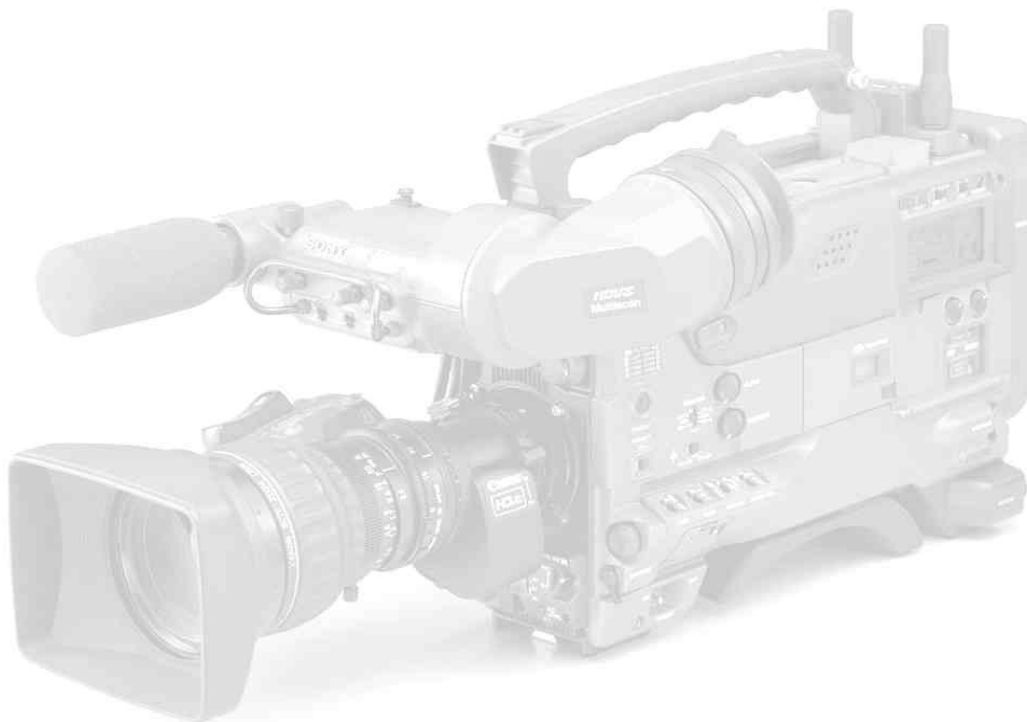

The HDW-750P is a high definition camcorder recording to the HDCAM format. It can operate in either 25P progressive scan mode, or 50i interlaced. It's designed for the European HD for TV market, but has found many other applications, from corporate to commercials and movies. The HDW-730S can operate at either 50i or 59.94i and is designed mainly for TV applications for the European or American / Japanese / 60Hz market.

*This guide is designed for people using the Sony HDW-750P or HDW-730S camcorder who need some practical advice when preparing for a shoot. It's pitched at a level that will make most sense to people coming from a Digital Betacam™ background, but will hopefully still be of use to those coming from film or other formats.*

*As usual with these guides, the general philosophy is to record as much information as cleanly as possible to the tape. There are many ways you can change the look of your pictures in camera, but unless you're sure you're going to get exactly the final effect you want, then you're probably better spending time on lighting and composition. There are some important settings you need to get right, but after that, the '750 probably needs less 'fine tuning' than equivalent standard def. cameras.*

## Contents

1. Quick Start
2. Differences between the 7590P and 730S
3. Files and Menus
  - 3.1 Menus
  - 3.2 Files
  - 3.3 Layers
  - 3.4 File Structure
  - 3.5 Loading Files
4. Camera matching
5. Frame Rate
6. Shutter
7. Gain
8. Outputs and monitoring
9. Options
10. Audio
11. Filters
12. Detail
13. Matrix and gamma
14. Lenses
15. Back focus
16. Viewfinders
17. V2 Software and film transfer mode
18. Menu list

## 1.0 Quick Start

If you're asked to use the '750 or '730S at short notice, and don't have the luxury of preparation time, here's a very short list of things to check to get you in the right ball park for getting sensible pictures:

- If you have a memory stick you wish to use: load an all file.  
*The all file overwrites all previous settings in the camera with your preferred settings.*
- If you don't have a memory stick, go to the file menus and set **user file**, **reference file** and **all file** to 'ALL PRESET'  
*This is effectively a factory reset.*
- If you're putting everything to all preset, after doing so, you may wish to turn on the preset matrix and set it to matrix 2 (ITU-709). You should turn the detail level down to about -30.  
*These two adjustments will get you from the factory preset condition which is a little de-saturated and over detail corrected, to a useful general purpose shooting condition.*
- Choose a frame rate.
- Set the shutter to 50Hz if shooting at 25P.

All these operations are covered in more detail in the following sections.

## 2.0 Differences between 750P and 730S

In most respects the two camcorders are identical. The following are the important differences:

HDW-750P	HDW-730S
25P or 50i	50i or 59.94i
2x optical filter wheels	1 x optical filter wheel
FIT CCDs	IT CCDs
Concealed accessory connector at rear	No connector

## 3.0 Files and Menus

The explanation in the manuals of how the files and menus work is a little confusing to say the least. This is an attempt to clarify what happens and when.

- There are **menus**, which allow you to access and adjust a parameter.
- The values for each parameter are stored in **files**.
- There can be a value stored for a parameter in each of several **layers** of information.
- The end result can be the sum of the data values in several layers (Relative Data)
- The end result can be the value of just the top layer of data. (Absolute data)

The terminology used in the manuals is possibly the most confusing aspect. For instance the word 'USER' is applied to menus, layers and files...user menu; user file; user layer. The difference between these three terms is important.

### 3.1 Menus

The access point to groups of adjustable items.

- **User Menu**  
Normally accessible whenever the camera is switched on. Stuff from any of the menus below can be added to this menu, so that it could become the only menu you need. You can't really say what the user menu does, as it depends how many items and pages from the rest of the menu are allocated to it.
- **Top menu**  
This is the menu of menus...Normally when you turn the menu on, you get the user menu as described above. If you turn the menu on whilst holding the front scroll button pressed in, you get the following extra menus to pass the time with in airport departure lounges:
- **User Customize**  
This is where you go to customize the user menu described above. Here you can add and delete items to the user menu. You can create 5 pages of 10 items chosen from the menus below, plus any whole pages you like, to create your user menu.
- **All menu**  
72 pages of settings. As the name suggests it contains all the available pages. These 72 pages are then split into more manageable chunks, comprising the operation, paint, maintenance, file and diagnostic menus described below.
- **Operation Menu**  
Things that affect the way switches, outputs and displays are configured. Not items that directly affect pictures, but affect the way the controls work.

- **Paint Menu**  
Picture control. 'The look'. Detail, Gamma, Knee etc. are all adjusted in this menu. Also has access to scene files to store and recall different 'looks'.
- **Maintenance Menu**  
Format switching (25P/50i ) is here, plus more obscure technical stuff. Includes the things that used to be in the menu accessed via the button on the timecode panel on digital betacam camcorders.
- **File Menu**  
Save, load, store and recall all the different file types. (You can also access some files from within each individual menu. For instance you can load a lens file from within the operation menu, or from within the file menu...it's the same result.)
- **Diagnostics**  
In the unlikely event of a problem! This menu can help isolate a fault to a particular board. Also tells you software versions of the various boards in the camera, and drum running and operation hours.
- **(Service Menu)**  
Not normally accessible. You need to set internal switches to gain access to this menu.

### 3.2 Files:

Stored information about groups of adjustable items

- **User**  
Holds whatever values have been allocated to the user menu.
- **User Preset**  
The user file can be stored as a default setting, by moving it from the user layer to the preset layer. See layers below.
- **Scene**  
Mostly items from the paint menu. Use this as a sort of 'scratchpad' for holding picture set-ups.
- **Reference**  
Stored separately to the other files, this is only accessed during an 'auto level' operation. Auto level is a function normally associated with systems cameras, and is only accessible from RCPs designed for this kind of work, so is not really relevant to the '750. During auto level the camera reads the reference file, and copies the items held in it to the preset layer of the camera.
- **All**  
Overwrites all the user and preset layers, except for items held in the lens file. This is the one to use for matching cameras.
- **Lens**  
Shading, flare and colourimetry info specific to the lens or camera.

### 3.3 Layers:

Where the files are stored

- **User**  
This layer is added to the preset, service and factory layers to produce the final output of the camera. Any values you tweak via the menu are changed in this layer, and if you recall a file you will see the results here.

- Preset**  
 A default setting where you can decide what the default should be. When you hit the STD button on an RCP, or ALL PRESET in the menus, you are deleting various values held in the user layer, leaving the camera at its preset value. Use STORE USER PRESET or STORE ALL PRESET to change the default settings.
- Service**  
 Think of this as the factory reset level (though factory level is actually another layer down). If you clear the user and the preset layers, this is where you end up, as the camera came out of the box. (This is done using CLEAR ALL PRESET in the ALL FILE page of the file menu.)
- Factory**  
 What it says.
- Memory Stick**  
 You can store 100 user files, 100 scene files, 100 all files, 100 lens files and a reference file on a memory stick. That's probably enough. The files are very small, so you can use the smallest capacity memory stick you can find. Doesn't have to be Sony (though files loaded from a Sony stick will of course give a much more pleasing look to your pictures). Memory stick duo or pro won't work, but 'magic gate' varieties seem to be OK.

### 3.4 File Structure

MENUS LAYERS	USER	USER CUSTOM	OPS	PAINT	MAINT	FILE	SERVICE	DIAG.
USER	User File			Scene File x5		Lens File x5		
			All File					
PRESET	Preset User File			Reference File				
SERVICE								
FACTORY								
MEM. STICK	User files x100			Scene files x100		Lens files x100 All files x100 Ref file x1		

Best not to use the reference file. You can delete it using REFERENCE CLEAR, though loading an ALL file will overwrite all the values created from it. (The reference file itself is not overwritten.)

### 3.5 Loading Files

**Load** and **save** operations relate to file transfer to and from memory stick.

**Store** and **recall** relate to file transfer within the camera.

#### **If you have a memory stick with setups already stored on it:**

Open the side panel and insert the memory stick. The red LED will light if the memory stick is recognised.

No files are loaded until you go to the menus and tell the camera to load a file.

Press the front rotary control in, and keep it pressed while you use the toggle switch on the side of the camera to turn the menu on.

You should now see the 'TOP MENU' displayed in the viewfinder.

Turn the rotary control, and select the 'FILE MENU'

Turn the rotary control and select the 'USER FILE' page.

If you have a 'USER' file stored on your memory stick, this is probably the best one to load first.

- If you've customized the user menu it will now contain the pages you need to use, so you don't need to find the 'TOP MENU' and navigate through to the page you need.
- It will set up the camera monitoring outputs the way you want and display the menus on the downconverted composite output if required.
- It will set up the viewfinder displays the way you like to see them.
- It will configure the buttons and switches the way you like to use them.

Select 'USER FILE LOAD' and choose the file you wish to use. If you don't have a file stored, select 'USER PRESET', which returns the user menu to the factory preset settings.

Turn the rotary control and select the 'ALL FILE' page.

Loading an 'ALL' file is like wiping the slate clean before using a camera. All settings that will affect the way your pictures look will be overwritten, and you can be sure of starting from a known point. If you haven't created an 'ALL' file, then you can select the factory preset file.

Select 'LOAD ALL FILE'

If you have a suitable file on the memory stick, select and load it.

**If you don't have a memory stick**, and you want to clear any existing set up from the camera:

From the 'ALL FILE' page, select 'ALL PRESET'

This is the equivalent of hitting the factory reset button.

Finally, go to the 'SCENE FILE' page, and confirm that none of the check boxes next to the scene files have been selected. (Click on the scene file to de-select.)

Think of the 'ALL' file as the base level for the camcorder that you wish to start from for a particular shoot.

If you have some scene files stored on your memory stick, load them as well, but it's not essential. Use the scene files to store adjustments and tweaks to that initial setup.

If the camera already has some scene files left in it, labelled 'Oscar Winning Cinematographer V1.0' or similar, it's probably best to ignore or overwrite them. Even if they were your files originally, they could have been modified and re-saved.

*Check the camcorder is set to the correct frame rate.*

Frame rate cannot be selected by loading files, as changing frame rate requires power down and power up. You can however store the frame rate you wish to use in a file, and you will get a prompt to change the frame rate during the file load process if it's not set to the one associated with the file.

If you're shooting at 25P, set the shutter to 50Hz

## Scene Files

These are a bit different to other files and are usually handled in groups of 5. You can think of them as a different 'look' for your pictures, or the equivalent of loading a different film stock in a film camera.

The camera itself will remember 5 scene files. It has 5 'slots' any of which can be selected by clicking on the box next to it.

On the memory stick you can store 20 pages each with 5 files.

Page '0' is what is actually in the camera, pages 1 to 20 are on the memory stick. (This is key to understanding how the files are loaded stored and selected.)

If you want to install a batch of your favourite scene files into the camera, use the 5 file load feature. Find the page on your memory stick with the batch of 5 files you want, and load them into the camera. You can then remove your memory stick, and select whichever of the 5 files you prefer, which are now saved in the camera memory.

At the end of the shoot you might wish to delete your files from the camera before you send it back (if it's hired in / second camera). Old files have to be over-written if you want to get rid of them.

It's probably easiest to select 'preset' from the scene file memory, and save it into all 5 slots in the camera. Then '5 file save' to say page 20 of the memory stick.

Then when you want to clear a camera's memory, do a '5 file load' from page 20 of your memory stick, overwriting all the slots in the camera with the preset values.

## 4.0 Camera Matching

Use the same 'ALL' file for all cameras on a multi-camera shoot.

Easiest method of keeping things colour matched is to use preset white balance and the same filter on all cameras. (Unless of course colour temperature changes during the shoot, and you want the white balance to stay the same.)

Ideally, all cameras should be checked against a reference camera, on the bench before the shoot begins (yes, yes...I know). If there is any small difference in preset colour temperature, it can then be offset electronically or VA gains can be tweaked to match.

When genlocking cameras, the '750 and '730 will read SD sync pulses in order to lock to timecode. If doing a live HD mix, then tri-level sync must be used.

## 5.0 Frame Rate

The HDCAM format allows for many different frame rates. With the HDW-750P, things are a little simpler, as you can record at either 25P or 50i. Put very crudely, you've got film mode and video mode.

25P will give you similar motion artefacts (flicker and blur) to film acquisition (see also the next section on use of the shutter.)

In 50i mode you will have the same motion artefacts as with Digital Betacam, but at a much higher resolution of course.

Shooting at 25P doesn't mean you're excluded from the 24P world of theatre projection and international distribution. 25P originated material can be played back 4% slow at 24P, in a kind of inverse way to a 24fps movie going through a telecine at 25fps.

The '730S also offers two frame rates: 50i and 59.94i

There's no progressive scan mode in the '730, so if you're looking for a filmic look, ideally you'd use the 750P, or F900. That's not to say you couldn't use the film effect process on 50i pictures from the 730S, in a similar way to digi-beta....but with 1080 line source material you'll get a much better result than you would with digi-beta.

The 730s has a useful advantage if working for productions coming from the NTSC world, as it can work at 59.94i (people often think of NTSC as 60Hz, but it's actually 59.94Hz)

Most HD VTRs can be set to play back at a wide range of different speeds. If for instance you've shot at 25P and you're scanning back to 24fps film, your programme duration will be 4% longer, and audio will be pitch shifted half a semitone down (though it can be electronically shifted back again and re-layed if necessary).

## 6.0 Shutter

Use of shutter on an HD camcorder is a little different to Digi Beta. The progressive scan mode (25P) that is the most popular mode of operation on the HDW-750, really needs to be used with the electronic shutter switched on. (Unlike Digi Beta, where it is rarely used).

In 25P mode, the camera takes 25 pictures per second (similar to a film camera) each one exposed for 1/25<sup>th</sup> of a second. This is quite a long exposure, and results in a significant blurring of moving images. If you use the shutter to expose for only half this period (i.e. 1/50<sup>th</sup> of a second) you get a more acceptable compromise between blur (no shutter) and flicker (fast shutter). This isn't really very surprising, as you are acquiring images in the same way as a film camera normally would, with a 180 degree mechanical shutter.

As a general rule, a shutter speed twice that of the frame rate is equivalent to a 180 degree film camera shutter and gives good results. You can still tweak the 'angle ' of your shutter if required, e.g. to eliminate flicker from 60Hz lighting, use a 60Hz shutter; or to eliminate flicker from a computer CRT monitor, use the clearscan facility.

At a frame rate of:	A film shutter angle of:	Is equivalent to:
24 fps	200 degrees	43.2 Hz
24	180	48
24	172.8	50
24	144	60
24	120	72
25	200	45
25	180	50
25	150	60
25	120	75

With software version 1.7 and above it is possible to change the display of shutter speed to angular notation.

This can be done from the service menu (see your dealer for to get this feature enabled for you.)

## 7.0 Gain

The gain selections available from the switch on the side of the camcorder can be programmed in the user menu just like other camcorders.

A further option, available via the service menu, is to have the gain level displayed as an ISO / ASA sensitivity rating. Useful if you're from a film background, but this feature should be used with care, as the displayed 'speed' of the camera does not take into account other factors affecting sensitivity:

- Shutter
- ND filters
- Range extender
- Transmission factor of the lens

These should all be added into the equation before attempting to expose pictures purely by using a light meter and the ASA rating of the camera.

Gain / dB	ASA
-3	440
0	630
3	880
6	1300
9	1800
12	2500
18	5000

Note that if you're shooting at 25P you will probably choose to use a 50Hz shutter, and should therefore rate the cameras speed at half the above figures,

## 8.0 Outputs and Monitoring

HD will not fit into a PAL monitor. Too many lines, too high line frequency. This can make things a little awkward for location monitoring and viewing.

The HDW-750P / 730S however, comes with a number of standard and optional output signals that should give you what you need.

Firstly there's an HDSDI output. HDSDI is a similar idea to the SDI signal that is the de-facto digital interchange for standard definition. It just sends a lot more bits per second. (1500 Mbps as opposed to 270Mbps for SDSDI.) Unfortunately we're going to have to get used to the fact that there are now two flavours of SDI, and they don't mix.

Use the HDSDI output to connect to an HD monitor with an HDSDI input card. This is the signal you should use for critical picture monitoring, or to send to a separate HD VTR or disk recorder for a parallel recording or copying.

*HDSDI is a very high frequency signal, so it doesn't go very far down an ordinary BNC cable...about 40m maximum.*

The test out BNC supplies an analog luminance (Y) HD signal that can be fed to an HD monitor with a component input. It will only show a monochrome picture, as it's only luminance, with no colour components, but you can use it to check framing or view menus.

However...most camcorders are fitted with a down-converter option, that gives you several SD monitoring options.

### How do you tell if the down-converter option is fitted?

- There will be an extra BNC connector fitted in a 'bulge' in the bottom right hand corner of the side of the camcorder, pointing out of the back next to the 12V DC XLR connector.

From this connector you will be able to get either of the following, as chosen from the user menu:

- Composite PAL signal, that can be fed to any SD monitor with a composite input,
- SD SDI signal for good quality SD monitoring, or perhaps a Digi Beta

At the same time the test output can also now supply a composite video signal, so you could have for example:

- Composite video from the test output feeding floor monitors.
- SDI from the down-converter output feeding a digi beta or DVCAM offline VTR
- HDSDI feeding an HD directors monitor.

## 9.0 Other Options

These are the optional boards that can be fitted internally to the HDW-750P or 730S:

- HKDW-702 Down-converter for SD SDI or VBS outputs.
- HKDW-703 Cache recording for time-lapse or loop recording.
- HKDW-704 GPS support (TBA)
- HKDW-705 Slow shutter option. Up to 64 frame exposure times.

You can check which options are installed on the final page of the diagnostic menu.

## 10.0 Audio

Similar to Digital Betacam, but here are some points to bear in mind:

- The supplied front mic. is stereo, and uses a 5 pin XLR connection to the camera body.
- The optional internal radio mic. option is the WRR-855 model, as used previously on SX and IMX camcorders. It's a single channel diversity unit.
- There's an extra 3.5mm monitoring jack connection at the front of the camcorder.
- All those difficult to access menu items that you used to have to get to via the timecode panel on Digi Beta are now in the main camera menus, in the maintenance section.
- If you are using the HDVF-C30W colour viewfinder, there is no attachment point for the front mic. (You can use mic. mounting bracket CAC-12 )

## 11.0 Filters

As this camera provides such a lot of natural resolution, and you've probably paid a lot of money for an HD lens, it seems kind of perverse to put softening filters in front of the lens unless there's a particular dramatic effect you're after. Otherwise internal filters are the same as Digital betacam. Alternative internal filters can be provided by Tiffen or Calmar. Contact your dealer to have them fitted.

The 750P has a dual filter wheel, the 730S having a single wheel with a mix of colour correction and ND filters.

## 12.0 Detail

As mentioned above, there's a lot of natural detail available, and even with the detail switched off entirely, you'll still get very good pictures. The camcorder is often used in this mode, particularly if there will be a final print to film. Leaving a small amount of detail correction in will not cause any visible ringing or overshoots on edges.

Some things to be aware of:

- The HDW-F900 and the 'HDW-750P / 730s are very different in the way the detail works. There's much less range available on the F900, and if you wind the detail up to the end stop, it still won't make the pictures very hard edged or unpleasant.
- The '750 / 730 is different. If you wind the detail right up you can get very hard edged pictures indeed.
- Beware of winding detail level down too far. Below about -50 it will start to apply negative detail, and artificially soften edges. (i.e. softer than just turning detail off.)

## 13.0 Matrix and gamma

- Key to the matrix and gamma curve numbers used in the paint menu:
  - EBU matrix is recommended, or ITU-709 preferred by BBC R&D.
  - Matrix off will give an acceptable but desaturated look.
  - Standard Gamma curve 4 has a high initial gain, and is useful if going through a grading process during post production.

Matrix and Gamma selections in the camera menus usually just give you a number...less than helpful. The table below tells you what the number means when selecting matrix, standard gamma or film gamma.

	<b>Matrix</b>	<b>Std. Gamma</b>	<b>Film Gamma</b>
<b>1</b>	SMPTE-240M	Digi Beta (3x)	5248
<b>2</b>	ITU-709	SMPTE 240M (4x)	5245
<b>3</b>	SMPTE Wide	ITU 709 (4.5x)	5293
<b>4</b>	NTSC	BBC (5x)	5296
<b>5</b>	EBU		
<b>6</b>	ITU-609		

## 14.0 Lenses

The lens mount is the standard 2/3" bayonet mount, and all the main manufacturers provide a range of HD lenses, in film style and EFP variants, plus several sets of primes. You can of course use SD lenses on HD cameras, and they'll function perfectly well. It does seem a bit like buying a very expensive hi-fi system and using some cheap speakers though.

### 15.1 Back focus

There is no particular problem with back focus on the '750 / 730, or the 'F900. It's a slightly more precise adjustment, because of the smaller circle of confusion of HD, but the principle is the same as SD.

## 16.0 Viewfinders

There are three options available:

- HDVF-20W Monochrome tube monocular. (Flicker / blur in progressive mode can be exaggerated in the viewfinder.)
- HDVF-C30W Colour LCD monocular (Needs version 1.70+ AT and SS software. No mounting point for front mic.)
- HDVF-C750 Colour LCD 6.5" (Useful sidemount bracket which attaches to VCT-14 tripod plate is available from Dowling Design: <http://ddesign.co.uk/>)
- If you need an extension viewfinder, try: <http://www.accuscene.com/>

## 17.0 V2 Software and Film Transfer Mode

From version 2.0 software onwards, a film transfer mode is available that gives improved performance for those wishing to print to film for final delivery. This mode uses a fixed pre-knee characteristic and a combination of black level and gamma curve adjustments to allow more dynamic range to be recorded and give more room for adjustment of pictures in a grading process. For other workflows, and for location viewing this may not be the best way to set up the camera. Recommended settings for this mode are the bold blue typeface figures in the suggested settings column of the following tables. These settings are also available as an 'ALL' file available directly from Sony.

## 18.0 Menu List

A complete list of menu items is attached. The ops manual and volume 1 of the maintenance guide will tell you what each item does, but you may find the list useful to note down your preferred settings.

A suggestion is offered where something other than the factory preset will give good results

### Disclaimer

Whilst every effort has been made to ensure the accuracy of this document, no responsibility can be accepted for consequential loss resulting from any error contained in it. Software versions change regularly. Please check that your pictures look the way you want them to on a properly set up monitor when entering new settings.

<b>OPERATION MENU</b>			
<b>01 OUTPUT SELECT</b>			
HD SDI OUT	on/off		Highest quality output for critical monitoring, or recording to external device. Max cable run approx 60m. Uses power, so turn off if you need to conserve batteries.
REAR BNC OUT	VBS/SDI/off		Composite video (VBS) or SDI selectable from this output, as long as the downconverter option is installed.
TEST OUT SELECT	HD/SD		Test output can deliver composite with menus superimposed, if downconverter installed, or one of the HD components if HD selected. (Y, R-Y or B-Y)
DOWN CON MODE	SQEZE /LETTR/CROP	SQEZE	The downconverter will also do aspect ratio conversion, and crop or letterbox the SD signal for you. SQUEZE is just standard 16:9.
<b>02 FUNCTION 1</b>			
ASSIGN SW 1	EZ-FC	Lens Ret	Various functions can be assigned to the button and switch on the side of the camera. Front mic on/off: Loop record: test out chc: Vf markers: easy focus: Re-take: ATW: Return video: Lens RET: Record: Turbo gain: Telemark: Zebra.
ASSIGN SW 2	F.Mic	VF markers	Front mic on/off: Loop record: test out chc: Vf markers: Zebra
FRONT MIC SEL	Mono/stereo		
DF/NDF	DF	NDF	Drop frame mode for NTSC timecode sync.
END SEARCH	Off		
LOOP/INTVL REC	Off		The loop recording and interval recording (timelapse) features are only enabled if the memory cache option is installed.
LOOP REC TIME	1 - 8 secs (0)		You can choose to start recording what happened up to 8 seconds ago when you hit the REC button
TAKE TOTAL TIME	5min		When using timelapse mode, set the total real time duration of the event to be captured here.
REC TIME	5sec		Set the duration of the event once 'timelapsed' here.
NUMBER OF FRAME	1		If in manual timelapse mode, you can set the number of frames to be recorded at each interval here.
TRIGGER INTERVAL	5 MIN		If in manual timelapse mode, set the interval between frame captures here.
PRE LIGHTING	Off		In timelapse mode, the camera can turn on the power to the anton bauer light connector a set interval before the frame is grabbed.
<b>03 FUNCTION 2</b>			
WHITE SW B	Mem/ATW		The memory B position of the white balance switch can be re-configured to be the auto tracing white balance switch. (or you could allocate ATW to an assignable button.)
SHOCKLESS WHITE	Off/1/2/3	3	You can set a 'soft' transition from white balance mem. A to mem. B
ATW SPEED	4		The speed of the above transition is set here.
LOW LIGHT	Off/on		Turn off that annoying warning message...
LOW LIGHT LEVEL	-99 to 99 (0)		....or set the level at which it appears.
BATTERY WARNING	10% - 20%		Sets the amount of battery warning for Anton Bauer batteries.
<b>04 VF DISPLAY 1</b>			
VF DISPLAY	On/off		
DISPLAY MODE	1/2/3		Mode 3 shows all warnings, and switch changes in VF, mode 2 shows some, mode 1 shows none.
EXTENDER	On/off		Following items determine how much information is displayed in your viewfinder:
FILTER	On/off		Displays which optical filters selected.
WHITE	On/off	Off	Displays white bal. A/B/Preset
GAIN	On/off	Off	Displays gain selected
SHUTTER	On/off		Useful to turn this one 'on' if in progressive scan, to remind you to use shutter.
AUDIO	On/off	Off	Displays audio level meters
TAPE	On/off	Off	Tape remaining time
IRIS	On/off		Displays F stop
<b>05 VF DISPLAY 2</b>			
ZOOM	On/off	Off	Numerical display of zoom position. Useful for reframing shots
COLOUR TEMP	On/off		White balance info.
VOLT	On/off		Battery voltage
DC IN	On/off		DC power input
WRR RF LEVEL	On/off		If you have the internal radio mic fitted, this will give you a signal strength reading in the viewfinder.
TIMECODE	On/off		TC in viewfinder, and on test out if characters enabled on test output.
GPS	On/off		Future option
<b>06 ! LED</b>			
GAIN	On/off		There's a warning ! marker that will appear in the viewfinder according to the way this page is set.
SHUTTER	On/off	Off	If you set an item to 'on' , then the ! will appear if that function is
WHITE PRESET	On/off	Off	
ATW RUN	On/off		
EXTENDER	On/off		
FILTER	On/off	Off	
OVERRIDE	On/off		
<b>07 MARKER 1</b>			
MARKER	On/off		
CENTRE	On/off		
CENTRE MARK	1 to 4 (3)		Different types of center marker.
SAFETY ZONE	On/off		
SAFETY AREA	80 /90 /92.5 / 95 %		
ASPECT	On/off		
ASPECT SELECT	14:9, 13:9, 4:3, Vista, Scope		Pre-set aspect ratio markers
ASPECT MASK	On/off		Turns on / off the 'greyed out' side panels outside the aspect ratio mask selected .
ASPECT MASK LVL	0 to 8		Sets the degree to which areas outside the aspect markers are greyed out
100% MARKER	On/off		

<b>08 MARKER 2</b>			
USER BOX	On / Off		You can draw a box cursor in the viewfinder, any size and position.
USER BOX WIDTH	240		Useful for re-creating a particular picture composition or framing.
USER BOX HEIGHT	135		
USER BOX H POS	0		
USER BOX V POS	0		
CENTER H POS			
CENTER V POS			
ASPECT SAFE ZONE			Turns ON/OFF the SAFETY ZONE MARKER display with respect to the ASPECT MARKER.
ASPECT SAFE AREA			Selects the ranges of the SAFETY ZONE MARKER display with respect to the ASPECT MARKER.
<b>09 GAIN SW</b>			
LOW	-3 to 42dB (0)	<b>[-3dB]</b>	Generally leave at '0'. Dynamic range very slightly reduced at -3dB.
MID	-3 to 42dB (6)		
HIGH	-3 to 42dB (12)		
TURBO	-3 to 42dB (42)	-3dB	Unlikely to use 42dB...you could set this switch to -3dB.
TURBO SW IND	On/off		
<b>10 VF SETTING</b>			
ZEBRA	On/off		Only use if you have a viewfinder without a front on/off switch
ZEBRA SELECT	Zebra 1, 2 or BOTH		Usually set zebra 1 at 70% and 2 at 95%. Gets a bit busy if you use both. Don't try and rationalize the numbers below. We know it should be a direct % equivalent, but it isn't. Sorry. Maybe future software version will sort it out.
ZEBRA1 DET LVL	1 to 100% (0)	0=70%	-15=65%, 0=70%, +19=75%, +90=95%, +110=100% (subject to small variations between cameras)
ZEBRA2 DET LVL	1 to 100% (0)	0=98%	-72=90%, -25=95%, 0=98%, +20=100%
ASPECT	Off		
VF DETAIL LVL	-99 to 99 (0)		VF detail allows extra detail to be sent just to VF. Gives the peaking control something to work on
VF DETAIL H LVL	-99 to 99 (0)		If the overall picture detail level is set very low.
VF DETAIL V LVL	-99 to 99 (0)		
<b>11 AUTO IRIS</b>			
OVERRIDE	Off		
SPEED	2		
CLIP HIGH LIGHT	Off		Turning clip highlight on tells auto iris to ignore small 'spikes' in luminance. Quite useful sometimes.
WINDOW	1		
WINDOW IND	Off		
VARIABLE WIDTH	240		
VARIABLE HEIGHT	135		
H POS	0		
V POS	0		
<b>12 SHOT ID</b>			
ID-1			You can pre-store some 'labels' here, and select one of them to appear super-imposed on colour bars if required. Selection is done on the next page: 'SHOT DISP / ID SELECT'
ID-2			
ID-3			
ID-4			
<b>13 SHOT DISP</b>			
DATE	On/off	On	
TIME MODEL	On/off	On	
MODEL NAME	On/off	On	
SERIAL NO.	On/off	On	
ID SELECT	On/off		
SHOT BLINK CHCTR			
<b>14 SET STATUS</b>			
STATUS ABNORML	On/off		
STATUS FUNC.	On/off		
STATUS AUDIO	On/off		
STATUS GPS			
<b>15 TEST OUT</b>			
MARKERS	On/off	On	
VF DISPLAYS	On/off	On	
MENUS	On/off	On	
ZEBRA	On/off		
OUTPUT SELECT	Y/R/G/B		
<b>16 OFFSET WHT</b>			
OFFSET WHITE A	On/off		
WARM / COOL A	Kelvin reading (3200)		
COLOUR FINE A	-99 to 99 (0)		
OFFSET WHITE B	Off/on		
WARM / COOL B	Kelvin reading (3200)		
COLOUR FINE B	-99 to 99 (0)		

<b>17 SHUTTER ENABLE</b>			
ECS	On/off		Electronic clear-scan. Continuously variable shutter used for example to eliminate flicker from CRT computer monitors
1/33	On/off		You can eliminate any shutter speed options you never use.
1/50	On/off		(Saves time when selecting a shutter speed with the toggle switch on the front of the camera.)
1/60	On/off		
1/125	On/off		
1/250	On/off		
1/500 1/1000	On/off		
<b>18 LENS FILE</b>			
LENS FILE SELECT	1		
F. ID			
F. STOP	1.7		
<b>19 UMID SET</b>			
EX OWNERSHIP REC			Unique material Identification information. Recorded in meta data to uniquely identify all recordings.
COUNTRY CODE			
ORGANIZATION CODE			
USER CODE			
INSTANCE NO.			
TIME ZONE			
MACHINE			
<b>20 GPS SETUP</b>			
GPS			There is a GPS option for these camcorders that will record location of all recordings in meta data.
GPS RELOAD(MS)			
GPS TRACE			
TRACE INTERVAL			
TIME ZONE			
GPS DATUM			
GPS 8 PIN FORMAT			
<b>PAINT MENU</b>			
<b>01 SW STATUS</b>			
GAMMA	Off/on		Switch various functions on and off. Generally leave them as factory set,
BLACK GAMMA	Off/on		
MATRIX	Off/on		.... except for matrix, which is usually switched on. See main matrix page in paint menu.
KNEE	Off/on		
WHITE CLIP	Off/on		
DETAIL	Off/on		
APERTURE	Off/on		
FLARE	Off/on		
EVS	Off/on		
TEST SAW	Off/on		
<b>02 WHITE</b>			
COLOUR TEMP A	Temperature (3200)		Tells you the colour temperature of the white balances stored in memories A and B
COLOUR FINE A	-99 to 99 (0)		You can manually adjust these values on this page.
R GAIN A	-99 to 99 (0)		
B GAIN A	-99 to 99 (0)		
COLOUR TEMP B	Temperature (3200)		
COLOUR FINE B	-99 to 99 (0)		
R GAIN B	-99 to 99 (0)		
B GAIN B	-99 to 99 (0)		
<b>03 BLACK</b>			
MASTER BLACK	-99 to 99 (0)	<a href="#">[-1]</a>	Master black lifts or darkens low luminance areas of the picture. Also known as pedestal.
R BLACK	-99 to 99 (0)		Individual colour blacks change the colour balance in low luminance areas.
B BLACK	-99 to 99 (0)		
MASTER FLARE	-99 to 99 (0)		
R FLARE	-99 to 99 (0)		
G FLARE	-99 to 99 (0)		
B FLARE	-99 to 99 (0)		
FLARE	Off/on		
OUTPUT SELECT	Y/R/G/B		
<b>04 GAMMA</b>			
GAMMA	Off/on		
MASTER GAMMA	-99 to 99 (0)		Master gamma lifts or darkens mid luminance areas of the picture.
R GAMMA	-99 to 99 (0)		Individual colour gammas change the colour balance in mid luminance areas.
G GAMMA	-99 to 99 (0)		
B GAMMA	-99 to 99 (0)		
OUTPUT SELECT	Y/R/G/B		Engineering control for looking at individual channels during lineup.
GAM SELECT STD	STD/FILM	<a href="#">[2]</a> 3	1 Digi Beta (3x), 2 SMPTE 240M (4x), 3 ITU 709 (4.5x), 4 BBC (5x)
GAM SELECT FILM	1 to 4 (3)	3	1 5248      2 5245                      3 5293                      4 5296

<b>05 BLK GAMMA</b>			
BLACK GAMMA	Off/On	[on]	Black gamma changes the initial slope of the gamma curve , only in the blacks.
BLK GAMMA RANGE	Low/l.mid/h.mid/high	[High]	Sets the affected luminance range. High setting will start to affect grey tones as well as black.
MASTER BLK GAMMA	-99 to 99 (0)	[22]	
R BLK GAMMA	-99 to 99 (0)		
G BLK GAMMA	-99 to 99 (0)		
B BLK GAMMA	-99 to 99 (0)		
OUTPUT SELECT	Y/R/G/B		Just selects monitoring signals during setup, not what goes to tape.
<b>06 KNEE</b>			
KNEE	Off/on		Usually leave the knee switched on.
KNEE POINT	50 to 109 (95)	[50] 90	Sets where, as a percentage of the luminance scale, the knee starts to act.
KNEE SLOPE	-99 to 99 (0)	[-136] -10	Sets how much compression is applied by the knee circuit.
KNEE SAT.	Off/on	[on]	Increases colour saturation in picture areas compressed by the knee, in proportion for RGB
KNEE SAT LEVEL	-99 to 99 (0)	[70]	
WHITE CLIP	Off/on		
WHITE CLIP LEVEL	100.0 to 109.5 (105)	[109.5]	Normally set to about 103% for BBC / ITV preferred levels.
<b>07 DETAIL 1</b>			
DETAIL	Off/on		
APERTURE	Off/on		
DETAIL LVL	-99 to 99 (0)	-20	Factory setting of '0' is a bit harsh. Normally turn down to between -20 and -30
APERTURE LVL	0 to 15 (0)		(don't turn detail level below -70...it starts to look artificially soft.)
H/V RATIO	-99 to 99 (0)		
CRISPENING	-99 to 99 (0)		
LEVEL DEP	Off/on		
LEVEL DEP LVL	-99 to 99 (0)		
DETAIL FREQ	-99 to 99 (0)		
<b>08 DETAIL 2</b>			
KNEE APERTURE	Off		Knee aperture adds detail edges only to highlight areas compressed by the knee circuit.
KNEE APT LVL	0		
DETAIL WHITE LIMIT	0	[-175]	Limits positive going (white halo) detail overshoots
DETAIL BLACK LIMIT	0	[-142]	Limits negative going detail overshoots
DETAIL V-BLK LIMIT	0	[34]	
<b>09 SD DETAIL</b>			
SD DETAIL	Off/on		There is a separate detail circuit for the down-converted SD output. Doesn't affect recorded pictures.
SD DETAIL LVL	-99 to 99 (0)	-10	SD detail acts after and in addition to the HD detail circuit.
SD CRISPENING	-99 to 99 (0)		
SD DETAIL WHITE LIMIT	0 to 15 (0)		
SD DETAIL BLACK LIMIT	-99 to 99 (0)		
SD LEVEL DEP	-99 to 99 (0)		
SD LEVEL DEP LVL	Off/on		
SD DETAIL FREQ	-99 to 99 (0)	+50	
SD H/V RATIO	-99 to 99 (0)		
<b>10 SKIN DETAIL</b>			
SKIN DETAIL ALL	Off		Skin detail can key out a particular colour tone and reduce detail levels in that area.
SKIN DETECT			Position the on screen marker over the colour to be corrected and select the auto detect function.
SKIN AREA IND	Off		Displays a zebra type pattern over the areas selected for correction.
SKIN DTL SELECT	1		3 different settings can be remembered.
SKIN DETAIL	On		
SKIN DTL LVL	0		Set the amount of detail to be removed (or added) here.
SKIN DTL SAT	0		Manually select the colour saturation to be targeted.
SKIN DTL HUE	0		Manually select the colour hue to be targeted.
SKIN DTL WIDTH	40		Manually select the width of the range of colours to be targeted.
<b>11 LINEAR MATRIX</b>			
MATRIX	Off/on		
MATRIX ( USER)	Off/on	[On]	
MATRIX (PRESET)	Off/on	[Off] On	
MATRIX ( PRST SEL)	1-2-3-4-5-6	2	1 SMPTE-240M, 2 ITU-709, 3 SMPTE Wide, 4 NTSC, 5 EBU, 6 ITU-609
MATRIX ( USER) R-G	-99 to 99 (0)	[-53]	The user matrix figures only come into play if MATRIX(USER) is switched on.
MATRIX ( USER) R-B	-99 to 99 (0)	[0]	Be careful of using user matrix numbers if you're not sure they come from a reliable source.
MATRIX ( USER) G-R	-99 to 99 (0)	[-5]	
MATRIX ( USER) G-B	-99 to 99 (0)	[-6]	
MATRIX ( USER) B-R	-99 to 99 (0)	[-1]	
MATRIX ( USER) B-G	-99 to 99 (0)	[-9]	
<b>12 MULTI MATRIX</b>			
MATRIX	Off/on		
MULTI MATRIX	Off/on		The multi-matrix can pick up on a particular colour in a scene and change its hue and saturation
AREA IND	Off/on		A zebra type pattern can be superimposed on targeted areas of colour
COLOUR DETECT			
AXIS			B/B+/MG-/MG/ MG+/R/R+/YL-/YL+/G-/G/ /G+/CY/CY+/B-
HUE	-99 to 99 (0)		
SATURATION	-99 to 99 (0)		

<b>13 V MOD</b>			
VMOD	Off/on		VMOD is a vertical shading correction that is typically required to correct a green/magenta vertical tint at the long end of high magnification lenses.
MASTER VMOD	-99 to 99 (0)		
R VMOD	-99 to 99 (0)		
G VMOD	-99 to 99 (0)		
B VMOD	-99 to 99 (0)		
OUTPUT SELECT	Y/R/G/B		
<b>14 LOW KEY SAT</b>			
LOW KEY SAT	Off/on		Used to increase colour saturation in low luminance areas of picture.
LEVEL	-99 to 99 (0)		Use with care, as effect on one scene may not look good for a different scene.
RANGE	Low/l.mid/h.mid/high		LOW : 0 to 3.6 % L.MID : 0 to 7.2 % H.MID : 0 to 14.4% HIGH : 0 to 28.8 %
Y BLK GAMMA	Off/on	[On]	
Y BLK GAMMA LVL	-99 to 99 (0)	[31]	
Y BLK GAMMA RANGE	Low/l.mid/h.mid/high	[H.Mid]	
<b>15 SCENE FILE</b>			
1 TO 5			Scene files store PAINT menu type, picture look related settings.
STANDARD			Factory reset type function, but only for the PAINT settings.
SCENE RECALL			
SCENE STORE			
FILE ID			Give your files a name.
<b>MAINTENANCE MENU</b>			
For reference only. Please only adjust items in this menu if you're sure you know what you're doing.			
<b>01 WHT SHADING</b>			
SHADING CH SELECT	R/G/B		White shading is used to correct lens errors.
OUTPUT SELECT	Y/R/G/B		You need a high quality light-box or sphere to perform any white shading adjustment.
RGB WHITE H SAW	-99 to 99		
RGB WHITE H PARABOLA	-99 to 99		
RGB WHITE V SAW	-99 to 99		
RGB WHITE V PARA	-99 to 99		
WHITE SAW/PARA	Off/on		
<b>02 BLK SHADING</b>			
SHADING CH SELECT	R/G/B		
OUTPUT SELECT	Y/R/G/B		
RGB BLACK H SAW	-99 to 99		
RGB BLACK H PARABOLA	-99 to 99		
RGB BLACK V SAW	-99 to 99		
RGB BLACK V PARA	-99 to 99		
BLACK SAW/PARA	Off/on		
MASTER BLACK	0		
MASTER GAIN (TMP)	0		
<b>03 LEVEL ADJ</b>			
Y LVL	-99 to 99		
SYNC LVL	-99 to 99		
Pr LVL	-99 to 99		
Pb LVL	-99 to 99		
TEST SAW	Off/analog/digital		
OUTPUT SELECT	Y/R/G/B		
<b>04 SD LEVEL ADJ</b>			
SD VBS LVL	-99 to 99		
SD VBS SETUP LVL	0% / 7.5%		
SD VF Y LVL	-99 to 99		
SD VF R-Y LVL	-99 to 99		
SD VF B-Y LVL	-99 to 99		
<b>05 BATTERY</b>			
BEFORE END 1	5%		
END 1	0%		
BEFORE END 2	11.3V		
END 2	11.0V		
BEFORE END 3	11.8V		
END 3	11.0V		
<b>06 VTR MODE 1</b>			
VIDEO OUT (F/R)	EE/PB		
AUDIO OUT (F/R)	CUE/EE		
REC AUDIO OUT	EE/SAVE		
CAMERA ADAPTER	ENABLE/DISABLE		
AUDIO CH 3/4 MODE	CH 1/2 or SW		
REAR XLR AUTO	Off/on		Automatically records the input from a rear XLR if there is anything connected.
FRONT MIC REF	-60dB		
REAR MIC 1 REF	-60dB		
REAR MIC 2 REF	-60dB		

<b>07 VTR MODE 2</b>			
AU REC EMPHASIS	Off/on		
CUE REC	Off/on		
AU REF LVL	-18dB/-20dB	-18dB	European standard headroom is usually 18dB.
AU REF OUT	0dB/+4dB/-3dB		
AU SG 1KHz	Off/on/auto		1kHz tone generator. If set to auto, comes on when bars selected.
MIC CH1 LVL	Side1/front/f+S1		
MIC CH2 LVL	Side2/front/f+S2		
REAR1 WRR LVL	Side1/front/f+S1		
REAR2 WRR LVL	Side2/front/f+S2		
<b>08 VTR MODE 3</b>			
TC OUT	Auto/gene		
DF/NDF	DF/NDF		
EXT-LK DF/NDF	Int/ext		
EXT-LK UBIT	Int/Ext		
LTC UBIT	Fix/time		
VITC UBIT	Fix/time		
WATCH AUTO ADJ	Off/on		
UBIT GROUP ID	000/101		
<b>09 VTR MODE 4</b>			
REC TALLY BLINK	Off/on		
REC START STOP	Off/on		
MODE SELECT	Sel/off/cont		
TIMER SET	1h/3h/8h		
STBY OFF TIMER	Off/5min/10min/30min/60 min	5 min	Saves wear on your head drum. Will drop into save mode after 5 mins in standby. Could catch you out if you really are waiting for an event that needs a quick start though.
STOP KEY FREEZE	Dsabl/frame /field		
<b>10 VTR MODE 5</b>			
LTC UB MARKER	set/all/off		
REC START MARKER	Off/on		
SHOT MARKER 1	Off/on		
SHOT MARKER 2	Off/on		
SHOT TIME DISP	Md:hm/dm:hm/d:hms		
<b>11 PRESET WHITE</b>			
COLOUR TEMP <P>	3200		Dial in your own preferred colour temperature for the preset setting.
COLOUR FINE <P>	-99 to 99 (0)		
R GAIN <P>	-99 to 99 (0)		
B GAIN <P>	-99 to 99 (0)		
AWB ENABLE	Off/on		
<b>12 DCC</b>			
DCC FUNCTION SELECT	DCC/adaptive knee /fix		
DCC RANGE	600%		
DCC POINT	-99 to 99 (0)		
DCC GAIN	-99 to 99 (0)		
DCC PEAK FILTER	0 to 3 (0)		
DCC DELAY TIME	-99 to 99 (0)		
PRE-KNEE POINT	FIX / AUTO	[FIX]	This is the key setting for the suggested 'film transfer' mode. Not stored in scene files, only in an 'ALL' file
<b>13 AUTO IRIS 2</b>			
IRIS WINDOW	1/2/3/4/5/6/ variable		
IRIS WINDOW IND	Off/on		
IRIS LEVEL	-99 to 99 (0)		
IRIS APL RATIO	-99 to 99 (0)		
IRIS VAR WIDTH	20 to 479 (240)		
IRIS VAR HEIGHT	20 to 269 (135)		
IRIS VAR H POS	-480 to 479 (0)		
IRIS VAR V POS	-270 to 269 (0)		
IRIS SPEED	0/1/2/3/4/5		Sets the servo reaction speed of the iris.
CLIP HIGH LIGHT	Off/on		Highlight clip tells the auto iris to ignore very bright 'spikes' and respond to overall picture.
<b>14 FUNCTION 3</b>			
WHITE FILTER INH	Off/on		
COLOUR BAR SEL	SMPTE/EBU/100%/75%/		SMPTE bars have a useful PLUGE type test pattern for lineup of monitors and viewfinders.
RM COMMON MEMORY	Off		For use when using RM-B150 or RM-B750 remote controls.
VTR STOP/START	RM		
USER AND ALL ONLY	OFF		
<b>15 GENLOCK</b>			
GENLOCK	Off/on		
RETURN VIDEO	Off/on		Useful for 2 camera shoots, where output of second camera can be connected to RET input.
GL H PHASE COASE	-99 to 99 (0)		
GL H PHASE FINE	-99 to 99 (0)		

<b>16 ND COMP</b>			
ND OFFSET ADJUST	Off/on		
CLEAR ND OFFSET	Exec		
ND ADJUST MODE			
<b>17 FORMAT</b>			
CURRENT			50i or 25P. Format is not stored in any files on memory stick, as changing format requires the camera to be powered on and off.
NEXT	50i / 25p		
<b>18 VANC RX</b>			
UMID LINE 1	0		
UMID LINE 2	0		
<b>FILE MENU</b>			
<b>01 USER FILE</b>			
USER FILE LOAD	Off/on		
USER FILE SAVE	Off/on		
F ID	Off/on		
USER PRESET	Off/on		
<b>02 USER FILE 2</b>			
STORE USER PRESET			
CLEAR USER PRESET			
CUSTOMISE RESET			
LOAD CUSTOM DATA	Off		
LOAD OUT OF USER	Off		
BEFORE FILE PAGE	Off		
USER LOAD WHITE	Off		
<b>03 ALL FILE</b>			
ALL FILE LOAD			
ALL FILE SAVE			
F ID			Name your 'ALL' file here.
ALL PRESET			The 'factory preset' button.
STORE ALL PRESET			You can effectively change your 'factory' preset by storing a new value here.
CLEAR ALL PRESET			If you want to be really sure you're getting back to factory preset, not a modified version, click here.
3SEC CLR PRESET	Off		
<b>04 SCENE FILE</b>			
1			
2			
3			
4			
5			
STANDARD			
SCENE RECALL			
SCENE STORE			
F ID			
<b>05 REFERENCE FILE</b>			
REFERENCE STORE			
REFERENCE CLEAR			
REFERENCE LOAD			
REFERENCE SAVE			
F ID			
SCENE WHITE DATA	Off		
<b>06 LENS FILE 1</b>			
LENS FILE RECALL			
LENS FILE STORE			
F ID			
F STOP	1.7		
LENS NO OFFSET			
SOURCE MEMORY			
<b>07 LENS FILE 2</b>			
LENS M V MOD	-99 to 99 (0)		
LENS CENTRE H	-480 to 479 (0)		
LENS CENTRE V	-270 to 269 (0)		
OUTPUT SELECT	Y/R/G/B		
LENS R FLARE	-99 to 99 (0)		
LENS G FLARE	-99 to 99 (0)		
LENS B FLARE	-99 to 99 (0)		
LENS W-R OFFSET	-99 to 99 (0)		
LENS W-B OFFSET	-99 to 99 (0)		

08 LENS FILE 3			
SHADING CH SEL	R/G/B		
OUTPUT SEL	Y/R/G/B		
LENS RGB H SAW	-99 to 99 (0)		
LENS RGB H PARA	-99 to 99 (0)		
LENS RGB V SAW	-99 to 99 (0)		
LENS RGB V PARA	-99 to 99 (0)		
09 MEMORY STICK			
FORMAT	Off/user/all/ scene/lens refer		
MS IN > JUMP TO			
10 TELEFILE			
TELEFILE CLEAR			
TELEFILE MARK	OK		
ID			
SIZE			
REMAIN			
STATUS			
DIAGNOSTICS MENU			
01 HOURS METER			
RESET METER			Reset when upper drum replaced.
DRUM RUNNING			Recommended replacement at 2000hrs. Can last longer, depends on working conditions.
TAPE RUNNING			
OPERATION			
THREADING			
DRUM RUNNING 2			Cannot be reset when new upper head drum installed. Total hours for machine.
TAPE RUNNING 2			
OPERATION 2			
THREADING 2			
02 TIME / DATE			
ADJUST			Worth setting the clock, as it makes setting the timecode to time of day very easy.
HOUR			
MIN			
SEC			
YEAR			
MONTH			
DAY			
03 ROM VERSION			
AT VER: XXX			The AT version is the main software version.
SS VER: XXX			
FP VER: XXX			
EQ VER: XXX			
04 DEV STATUS			
I/O EEPROM LSI			
05 OPTION BOARD			
DOWN CONVERTER			<input type="radio"/> Means you've got the option installed <input type="checkbox"/> Means it's not installed
HD SDI OUTPUT			Always installed as standard.
PICTURE CACHE			Does the time-lapse and loop recording
SLOW SHUTTER			Blurry long exposure effect. Also works well in conjunction with time-lapse.